
TPSh-M6M144SH1W

Recommended

Residential Roof


Utility Scale Ground Mounted

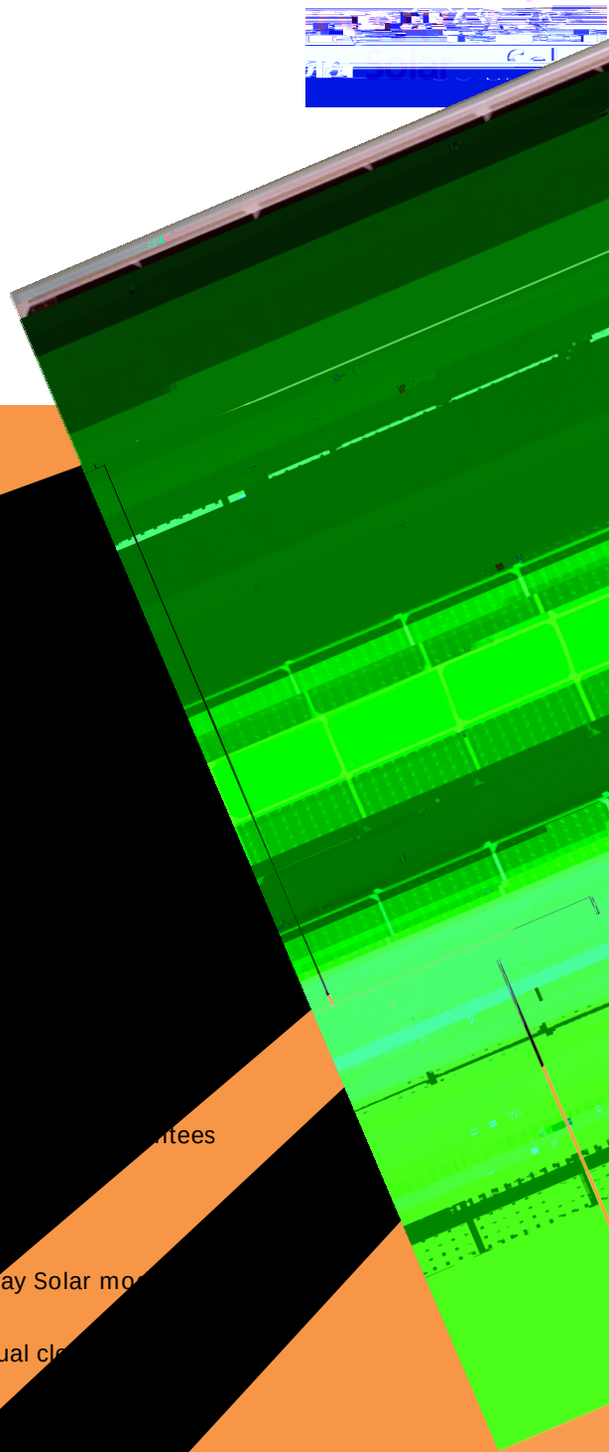

Half Cell:

- Half cell design allows the [illegible] operated in half of the [illegible]
  lower the internal [illegible] the CTM [illegible]
- Topr[illegible]lar [illegible]
  and [illegible]
- [illegible]
- [illegible]ntees
- [illegible]ray Solar mo[illegible]
- [illegible]dm manual cle[illegible]
- [illegible]ds(2400Pa) and [illegible]
- [illegible]n caused by Hig[illegible]
- [illegible]me[illegible]osion test.

C[illegible] Certification

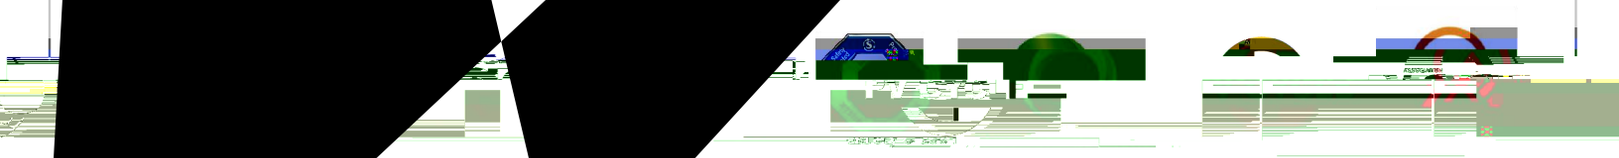

Mechanical Specification

TPSh-M6M144SH1W

Module Series	
Maximum Power at STC(Pmax)(W)	
Short Circuit Current(Isc)(A)	
Nominal Operating Cell Temperature(NOCT)	
Temperature Coefficient of Pmax(γ)	
Temperature Coefficient of Voc(β)	
Temperature Coefficient of Isc(α)	