
T

EVA Film

Encapsulation materialfor solar panel

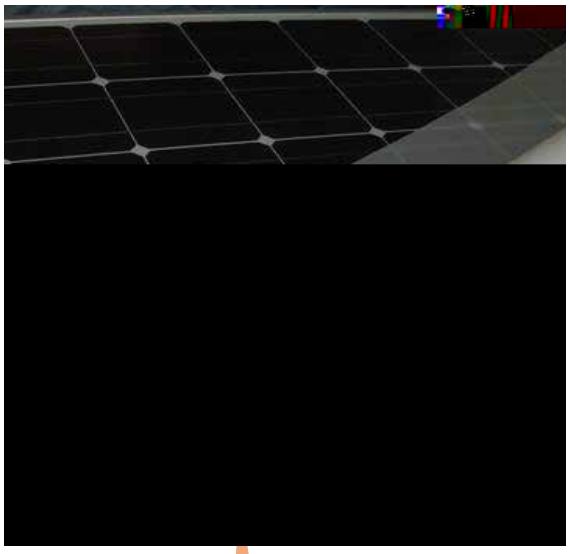

Packing

▲ The inner diameter of the paper tube is 76mm, each roll is 150m / 200m / 400m, each roll is sealed with PE film, and 9 rolls / 6 rolls / 2 rolls are placed in a carton.

Store

Temperature 0 ~ 30 ℃, humidity ≤60%;

The storage period of this product is 6 months from the production date

application

1. Make sure to store and use EVA film in a constant temperature and humidity room.
2. In order to avoid abnormal lamination of components due to static electricity, it is recommended to

3. The EVA film cut into sheets should be kept sealed to avoid pollution and moisture, and related

4. It is recommended not to use each roll near the paper tube and the outermost circle.

Note: read the safety and installation instructions or contact technical services for further information before using the product.

November 2020 Edition - Shenzhen tuori New Energy Technology Co., Ltd. all rights reserved.
Specifications are included in the data sheet and are subject to change without notice.

				Tesing Method
Tensile strength				
				GB/T 1410-2006
UV Light resistance (60kw.h/m²)				ASTM E 313
Heat/humidity resistance				GB/T 2423.3-2006
				GB/T 1033.1-2008
Thickness				GB/T6672
				GB/T6673

—
>1.0×1015
<5.0
<5.0
≥75
>50
>50
<3.0
<1.5 Hi

%

Ω·cm

Gel%
N/cm
N/cm
MD%
TD% Shrinkage Rate(120